


AUTOMATIC NOZZLES



Automatic version

The automatic nozzles are equipped with a device that automatically shuts-off the flow when the tank is full. Complete with swivel connector, they conform to the strictest safety requirements and have received all the necessary certifications. The strong and comfortable aluminum housing encased

in rubber, protects the nozzle from shocks and makes the grip comfortable even at low temperatures. The lever protection prevents accidental dispensing. Available in various sizes for flow capacities of 70, 90, 120 and 280 l/min. The model for low flow capacities is also available with reduced section spout for unleaded gasoline.

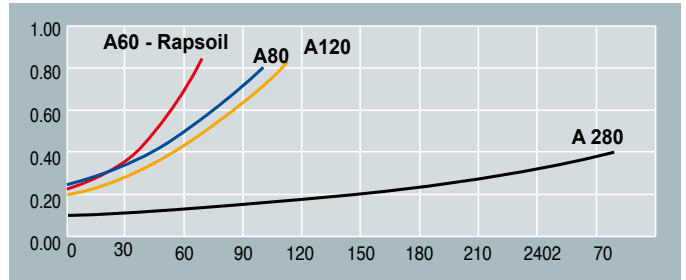

Lubrication Solutions Inc
 19703-B Eastex Freeway #100
 Humble TX 77338
 Phone: 281-619-8109
 www.lsidef.com



RAPSOIL nozzle available



UREA nozzle available



A60
 Flow rate **70** l/min
 with swivel



A80
 Flow rate **80** l/min
 with swivel



A120
 Flow rate **120** l/min
 with swivel



A280
 Flow rate **280** l/min
 with swivel



Code without swivel	Code with swivel	Description	Flow rate		Inlet		Spout ext. Ø mm	Weight Kg
			l/min	gal/min	without swivel	with swivel		
F12127000	F00603060	A60	70	19	F 3/4"G	F 1"G	24	1.25
F1244200A	F00602020	A60 Unleaded	60	16	F 3/4"G	F 1"G	20	1.20
F12449000	F00604030	A80	90	24	F 1"G	F 1"G	29	1.93
F12128000	F00610020	A120	120	32	F 1"G	F 1"G	29	1.93
	F13249000	A280	280	74	-	1 1/2"G	38,5	3.3
F09156000	F00613000	OPW 11 ALD-1041 - PTB certif. available	70	19	F 3/4"G	F 1"G	24	1.30
	F00614000	7 HL - PTB certification available	120	32		F 1"G	29	1.65
F00602040	F00602030	Autom. Nozzle RAPSOIL	60	16	F 3/4"G	F 1"G	24	1,25
	F0061903A	Autom. Nozzle UREA	40	11		F 3/4"G	19	2,60