



**CARRY**




**Transfer pumps**


Rotary, self priming, vane pumps featuring high flow rates, and easy operation and installation. The 24/12 version can be used with both voltages.

**Technical features:**

Vane pump with rotor.  
 Incorporated by-pass valve.  
 Connector block with ON/OFF switch.  
 Threaded 1" or 3/4" connectors.

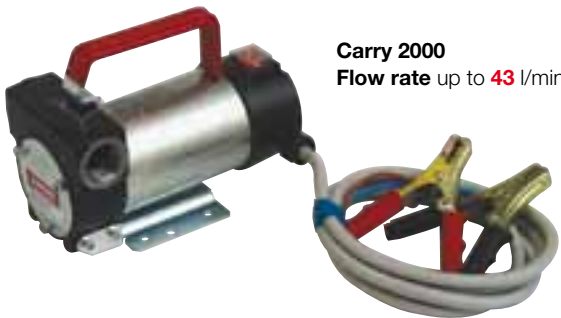

**Carry 2000**  
 Flow rate up to **43** l/min

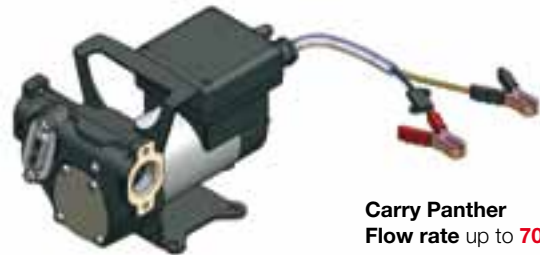

**Carry Panther**  
 Flow rate up to **70** l/min

**Kit Carry Bipump**  
 (including hose and nozzle)  
 Flow rate up to **80** l/min



**Kit Carry Panther**  
 (including hose and nozzle)  
 Flow rate up to **70** l/min



**CARRY**

Code	Description	Pumps	I/O	Flow rate		DC	Delivery Hose	Cable length	Nozzle	Weight	Packaging
				l/min	gal/min						
F0022300B	Carry 2000 12V	Bypass 2000	3/4" G	40	10	12	-	2	-	4,2	215x120x160
F0022400B	Carry 2000 24V	Bypass 2000	3/4" G	43	11	24	-	2	-	4,2	215x120x160
F0034000B	Carry Panther 12V	Panther DC	1" G	56	15	12	-	2	-	9,1	195x355x270
F0034104A	Carry Panther 12/24V	Panther DC	1" G	35/70	9/18	12/24	-	2	-	9,1	195x355x270
F0034006B	Kit Carry Panther 12V	Panther DC	1" G	56	15	12	5	6	M	12,5	357x357x275
F00341220	Kit Carry Panther 12/24V	Panther DC	1" G	35/70	9/18	12/24	5	6	A	13	357x357x275
F0034106C	Kit Carry Panther 12/24V	Panther DC	1" G	35/70	9/18	12/24	5	6	M	12,5	357x357x275
F00363280	Kit Carry Bipump 12V	Bipump	1" G	80	21	12	6	4	A	18	360x360x300