

METERS

SUZZARA BLUE K24



Accuracy +/- 1%
 Possibility of calibration.
Flow rate up to 31 gpm

EN Meter easy to install, in line or at the end of the delivery hose, it is provided with a compact easy readable display. It is possible to apply the meter directly on the nozzle. User can quickly substitute the 2 display batteries. Display can be rotated in 4 different positions.

Impulse type signals:
 single channel, reed switch.
 Electronic card with LCD display:
 5 digit partial total from 0.1 to 99999, 6 digit total from 1 to 999999.
 Resettable total available.
 Flow rate indication.
 Repetitiveness 0.2 %.

ES Este cuentalítrós es de fácil instalación, en línea o en el extremo de la manguera de suministro, y está dotado de un display compacto de fácil lectura. El cuentalítrós puede aplicarse directamente en la pistola. Dos baterías fáciles de sustituir alimentan el cuentalítrós. La pantalla puede ser girada en cualquier posición.
 Tipo de señal por impulso: mono-canal, interruptor de láminas.
 Tarjeta electrónica con display LCD: Parcial de 5 cifras de 0,1 a 99999, Total de 6 cifras de 1 a 999999.
 Total borrable disponible.
 Indicación del caudal.
 Repetibilidad 0.2 %.



K24 Pulse-meter
Flow rate up to 31 gpm
Accuracy ± 1 %
Pulse out 26 gpm
 (max distance 49 ft)

SUZZARA BLUE TURBINOX

Accuracy +/- 1%
 Possibility of calibration.
Flow rate up to 10 gpm
Puls OUT 26 p/gpm

EN This meter is easy to install. A tight stainless steel body provides endurance for use in every conditions. Also available a pulser display to connect an external receiver. User can quickly substitute the 2 display batteries.


ES Este cuentalítrós se instala fácilmente. Su robusto cuerpo de acero inoxidable lo hace resistente y apto para ser utilizado prácticamente en cualquier condición. Es disponible también un display emisor de impulsos para conexión a receptor externo. (El display es alimentado por dos baterías de fácil sustitución).



Inline pulse meter




Socket

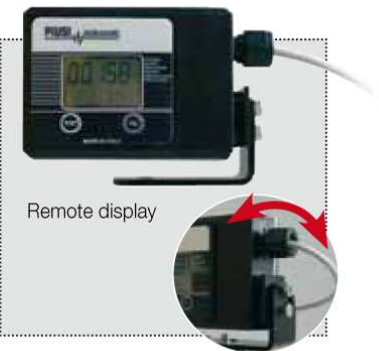

Remote display

Code	Description	Flow rate gpm	Pressure psi	Display	Pulse OUT (p/g)		Weight Lb	Packaging Inch
					Pulser version	Display version		
F0040710A	K24 Meter (1 socket)	1,3 - 31	300	Yes			1,1	Blister
F0040721A	K24 Pulse-meter (1 socket)	1,3 - 31	300	No	26	26	1,1	Blister
F0040200A	Inline turbine pulse meter	1,6 ÷ 10	420	No	26		1,6	9x4,7x6
F0049503B	Remote display with Pulse OUT			Yes		1 ÷ 26	2,2	9x4,7x6
F16073000	Socket 1" BSP/BSP (20 pcs)						5,3	Box (20 pcs)




Socket

1" BSP/BSP

SUZZARA BLUE K24 NOZZLE WITH

EN The simple solution to directly control your DEF dispensing. The K24 meter is installed inline on the nozzle.

ES Una simple solución que permite de vigilar directamente tu suministro de DEF. El cuentalítrós K24 es instalado sobre la pistola.

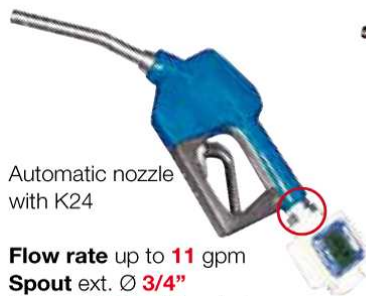

Automatic nozzle with K24

Flow rate up to 11 gpm
Spout ext. Ø 3/4"
Hose tail 3/4" with swivel



Manual nozzle with K24

Flow rate up to 20 gpm
Spout ext. Ø 3/4"
Hose tail 3/4" with swivel

Code	Description	Flow rate gpm	Pressure psi	Connections		Display	Weight Lb	Packaging Inch
				Inlet	Outlet			
F00870000	Automatic nozzle with K24	2 ÷ 18	50	3/4"	3/4"	Yes	6,6	16x11x4
F00870020	Manual nozzle with K24	2 ÷ 20	50	3/4"	3/4"	Yes	1,6	16x11x4



Adapter K24
 for automatic nozzle
 M 3/4" BSP - F 1" BSP

Code **F16475000**

Plastic adapter
 for K24 manual nozzle

Code **F15776000**