

Lubrication Solutions Inc
 19703-B Eastex Freeway #100
 Humble TX 77338
 Phone 281-619-8109
 www.lsidef.com

OCIO GSM



ANY FLUIDS



OCIO GSM,
 your personal
 tank guard.



EN GSM Tank level transmission

This system responds to a demand for the remote monitoring of tank levels, displaying the current situation on a telephone display or at an e-mail address.

A transmitter with a GSM modem is connected to the OCIO level indicator and, via one or more expansions, can control up to 8 tanks. Each tank is fitted with a level indicator which is connected by cable to the OCIO GSM box or to individual expansions. The system configuration involves sending coded telephone messages.


The OCIO GSM system provides:
 - Instant tank level reading.
 - Two alarms (minimum and maximum level) which send messages to one or more enabled telephone numbers or an e-mail address.
 - Regular tank level readings sent at pre-set intervals to predefined telephone numbers or an e-mail address.

Advantages
 The system can be used in all situations which require level monitoring without the need to be physically present, leading to timesaving and guaranteed reading in all situations.

Alarm messages are sent straight to the **supplier or plant maintenance technician** responsible for tank filling or emptying, for example, used fluid disposal.

The sending of regular messages enables site monitoring and guarantees the provision of **continual service** by the operators and suppliers, leading to remarkable savings through the **efficient logistic organisation** of refuelling or disposal trips.

Example:

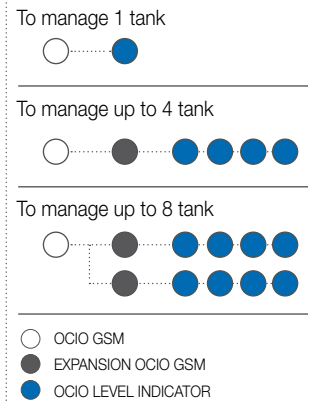

OCIO GSM



	Code	Description	Weight Kg	Packaging mm
OCIO GSM	F00755G30	OCIO GSM Quad band	1,5	300x410x100
	F00755G20	Expansion OCIO GSM tank 2-4	1,5	300x410x100
	F00755G40	Expansion OCIO GSM tank 5-8	1,5	300x410x100